



Axial RA-2 Hubset

Thank you for your purchase! We hope you're pleased with your new hubs and we're committed to offering the finest products at a great value to our customers. If there's anything we can do to assist, please let us know. The easiest & fastest way to reach us is by email – TalismanCycles@Gmail.com

Hub Measurements

Axial RA2

Front

100	Total width, mm
35	WL, width from center to left flange
35	WR, width from center to right flange
38	dL, left flange diameter
38	dR, right flange diameter
2.5	S, spoke hole diameter
28	# Spoke Holes

Rear

130	Total width, mm
38	WL, width from center to left flange
16	WR, width from center to right flange
49	dL, left flange diameter
49	dR, right flange diameter
2.5	S, spoke hole diameter
28	# Spoke Holes

Compatibility


The RA-2 hubset is optimized for Shimano / SRAM 11 speed HG-splined cassettes. If using 8-9-10 speed, use the supplied spacer at the base the cassette on freehub body (close to the spokes).

Maintenance

The RA-2 hubset requires very little other than basic care. The one thing to keep an eye on is freehub lubrication as this will dramatically extend the life of the rear hub.

We recommend cleaning & lubricating the freehub pawls every few thousand miles or at least once per year.

If your freehub begins to sound significantly LOUDER – like a clacking instead of clicking – it is likely dry & should be oiled. Heavier oils work best, Phil Wood Tenacious Oil for example. Don't use grease in place of oil, it can cause the pawls to stick & fail to engage.

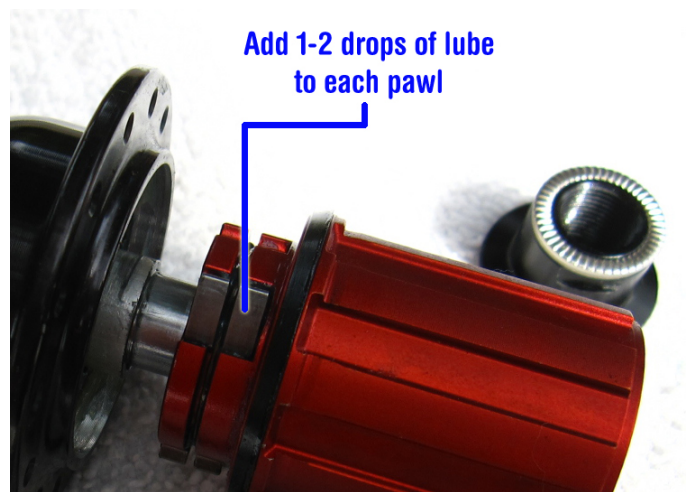

This is a simple process that can be performed by any competent bike tech. (2) 17mm cone wrenches and 5mm allen wrench. Re-torque end caps to 8lbs.